


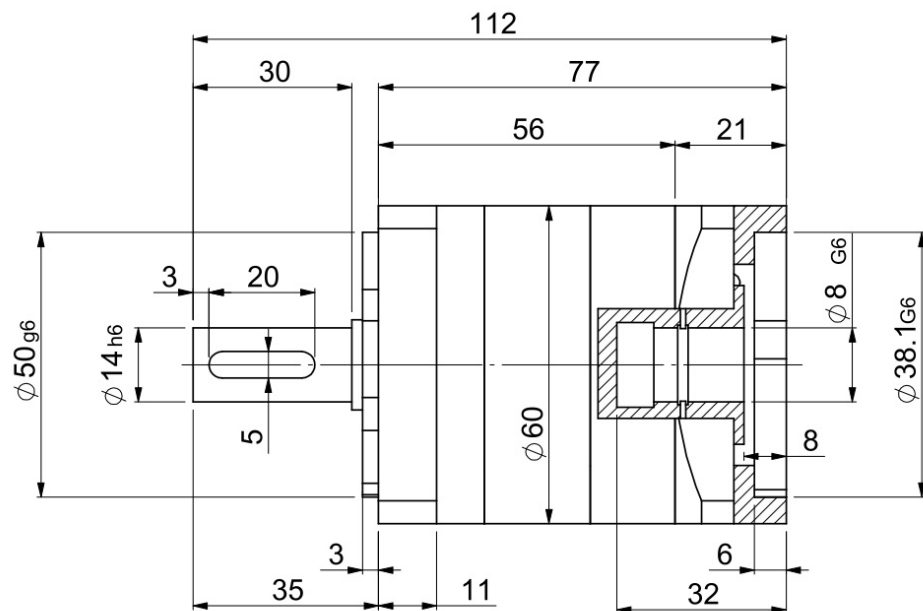


输出端output

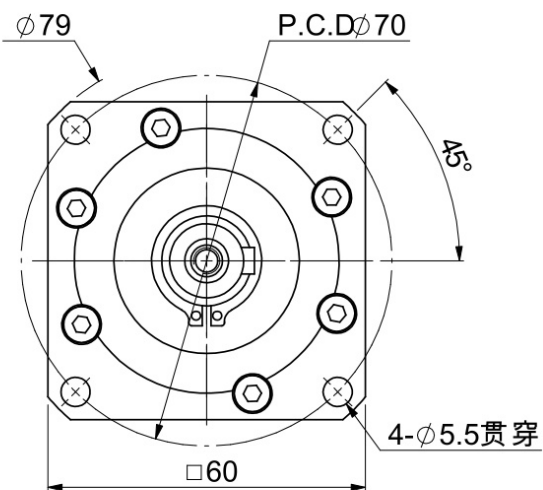

输入端input

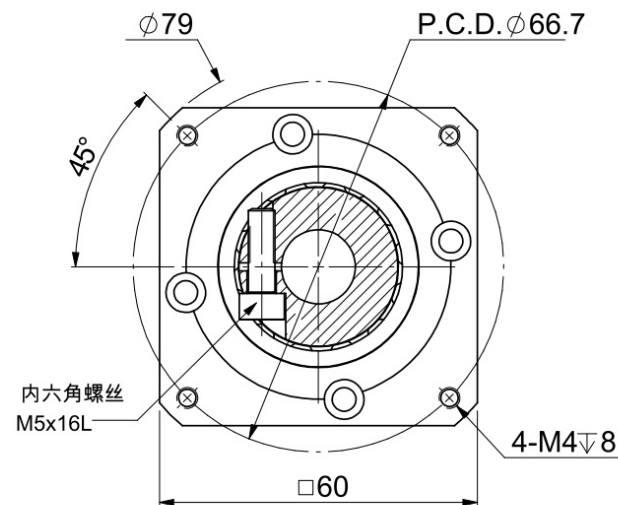

18				产品型号 Product Model	传动比 Transmission ratio	额定输出扭矩Nm Rated out put torque	传动惯量kg.cm ² Mass moments of inertia
名称 Title	精密行星减速机 Precision planetary reducer		客户P0/项目物料编码 Customer project material code	PLF060-3-S2-P2	3	27	0.46
最大输出扭矩 Max.Out put torque	1.5倍额定扭矩 1.5 times rated torque	润滑方式 Lubricating method	长效润滑 Synthetic grease	请确认签名/日期 Please confirm signature/date			
额定输入转速 Rated input speed	4000rpm	最大输入转速 Max. input speed	8000rpm	PLF060-5-S2-P2	5	40	0.46
容许径向力 Max. radial force	240N	容许轴向力 Max. axial force	220N	PLF060-7-S2-P2	7	34	0.41
效率 Efficiency	96%	使用温度 Operating temperature	-10℃~ +90℃	版本 Edition Version	22A/01	PLF060-10-S2-P2	10
传标准侧隙 Standard backlash	≤8arcmin	使用寿命 Srvice life	20000h	阶段标记 Stage Mark			
安装方式 Mounting position	任意 Any	防护等级 Protection class	IP65	第一角画法 First Angle projection			
噪音值 Noise level	≤58dB	重量 ±3% Weight ±3%	0.98Kg	恩坦斯特® ANDANTEX			
电机尺寸 Motor dimensions	Ø8*21/Ø38.1*1.6/4-Ø5.0-Ø66.7			Email:info@ngt-china.com		备注	